


STANLEY®

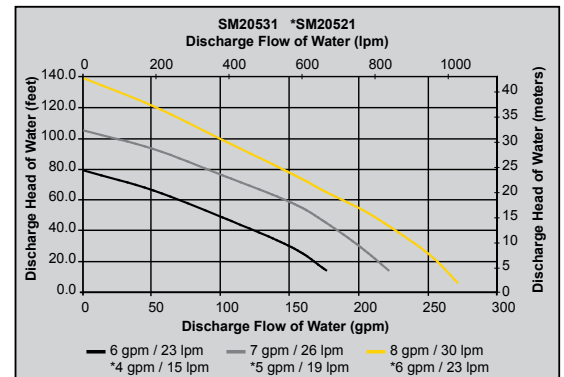

SM20 SUMP PUMP

The SM20 Water Pump is both lightweight and durable, making it a top choice for pumping needs. With a capacity of 250 gpm (946 lpm) at a 10-foot head and the ability to move solids up to 5/16 of an inch, it is perfectly suited for use in vaults and manholes. The SM20 outperforms most gasoline engine-driven pumps, and eliminates the need for recoil starting, priming, or suction hose that is typical of gas engine-driven pumps. It can even be run dry without any damage.

SM20 SUMP PUMP

FEATURES

- Submersed into the water and with its easy hookup to a power unit, the SM20 is instantly pumping
- The standard urethane impeller is highly abrasion resistant for long service pumping gritty slurries
- The abrasion resistant cast iron inlet wear ring is easily replaced from the inlet sit of the pump
- With only a few moving parts, the SM20 is virtually maintenance free

SPECIFICATIONS

CAPACITY	2-1/2 IN. DISCHARGE
PERFORMANCE	250 GPM / 946 LPM
FLOW RANGE	4 - 9 GPM / 15 - 34 LPM
PRESSURE	1000 - 2000 PSI / 70 - 140 BAR
PORTS	-8 SAE O-RING
WEIGHT	13.7 LBS / 6.3 KG
LENGTH	7.5 IN. / 19 CM
WIDTH	9.6 IN. / 24 CM
CONNECTION	3/8 IN. FLUSH-FACE QUICK DISCONNECT COUPLER
HOSE WHIPS	NO
MOTOR	INTEGRAL
DISCHARGE SIZE	2-1/2 IN. FEMALE PIPE THREADS

ORDER INFORMATION

PART NO.	DESCRIPTION
SM2043101	8 GPM (30 LPM), CE, STEEL IMPELLER
SM2052101	5 GPM (20 LPM), CE, URETHANE IMPELLER
SM2053101	8 GPM (30 LPM), CE, URETHANE IMPELLER

ACCESSORIES

PART NO.	DESCRIPTION
02183	FIRE HOSE, 25 FT X 2-1/2 IN. DIAMETER
02317	FIRE NOZZLE, 1 IN.
05133	THREAD ADAPTER FOR PUMP TO FIRE HOSE, 2-1/2 IN.
05134	FIRE HOSE, 50 FT X 2-1/2 IN. DIAMETER
05135	SPANNER WRENCH FOR PIN LUG COUPLER
29884	2-1/2 IN. COMBINATION NIPPLE (NPT)